










HYDRAULIC COMBINED SHEARING & PUNCHING MACHINE

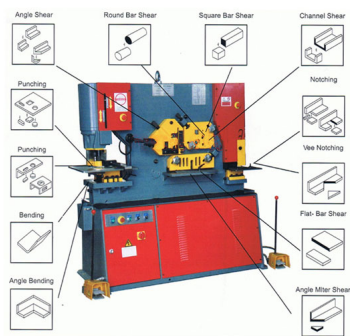

MODEL								
Q35Y-16	45	40×40	125×125 ×12	70×70 ×8	125×125 ×12	70×70 ×8	126×74×5	126×53×5.5
Q35Y-20	50	50×50	140×140 ×12	70×70 ×10	140×140 ×12	70×70 ×10	160×86×6	160×60×6.5
Q35Y-25	60	50×50	160×160 ×14	80×80 ×7	160×160 ×14	80×80 ×7	200×102×9	200×75×9
Q35Y-30	65	55×55	180×180 ×16	80×80 ×10	180×180 ×16	80×80 ×10	240×124×10.5	280×86×11.5

MODEL	Q35Y-16	Q35Y-20	Q35Y-25	Q35Y-30
Pressure (KN)	550	750	1100	1400
Shearing	t16×W250	t20×W330	t25×W330	t30×W355
Max. shearing	t8×W400	t10×W480	t16×W600	t20×W600
Plate (N/mm2)	≤450	≤450	≤450	≤450
Shearing angle	7°	8°	8°	8°
Stroke (mm)	80	80	80	80
Stroke (times/min.)	8	8	6	6
Throat depth (mm)	300	355	400	600
Max. punching (mm)	φ25×t16	φ30×t20	φ35×t25	φ38×t26
Main motor (KW)	4	5.5	7.5	11
Dimension (cm)	164×73×177	186×79×190	236×96×209	268×104×230
Weight (kg)	1600	2000	3850	6200